




TYPICAL DETAIL - uPVC LONDON JUNCTION

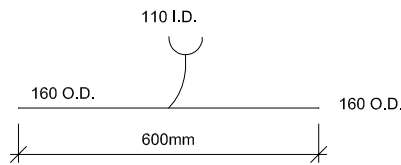

TYPE A - LONDON JUNCTION

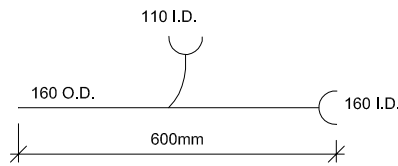

TYPE B - LONDON JUNCTION

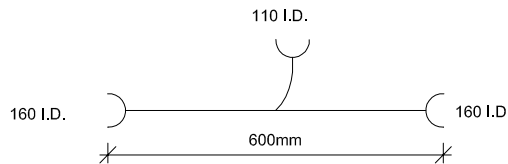

TYPE C - LONDON JUNCTION

KEY	
—	Plain Ended
—C	Rubber ring joint

**NOTE:**

- 1) uPVC to be SN16 to AS/NZS 1260 (1999).
- 2) Rubber rings to be "Z-ring" to AS/NZS 1260
- 3) Type A junction shall be used where junction is cut into an existing public drain
- 4) Type B junction shall be used where two or more junctions are to be laid back to back in an exist. public drain  
(Note: In such a case, at least one of the junction shall be a type A junction)
- 5) Type C junction shall be used where junction is installed on a new public drain under construction
- 6) Approved manufacturer is Solo Plastics Ltd



STANDARD DETAIL:

**STORMWATER SERVICE  
CONNECTION DETAILS  
LONDON JUNCTIONS**

DATE: June 2010  
NOT TO SCALE

TCDC NO:

SHEET NO:

REV:

**6000**

**3**